



Zhejiang Sian (Fuhua) Valve Co., Ltd.

T: +86 571 8682 1786 F: +86 571 8823 3026

E: sales@sianvalve.com

A: 3/F, Minghao Building, 1688 Binsheng Road, Binjiang District,
Hangzhou, Zhejiang Province, P.R. China 310052.

www.fuhua-valve.com / www.sianvalve.com




Gas Flow Control Expert



HISTORY



- 1992 > Ningbo Fuhua Valve Co., Ltd founded
- 1994 > First China valve company exported to overseas market
- 1995 > Certification of ISO9001 and ISO14001
- 2007 > Annual turnover reaches 100 million yuan
- 2008 > Granted National special equipment license
- 2011 > National high-tech enterprise awarded
- 2013 > High-tech enterprise R&D center authorized
- 2015 > Mayor Quality Prize
- 2016 > U.S. R&D center established
- 2018 > National Science and Technology Progress Award
- 2020 > Annual output 20 million units



FUHUA SIAN VALVE LEADER

MAIN EQUIPMENTS



• Automatic Press Forging Machine



• High-precision CNC Machine



• Automatic CNC Machine for brass Valve




• Automatic Cleaning Equipment





- R&D centers in U.S. and China.
- Our customers all around the world

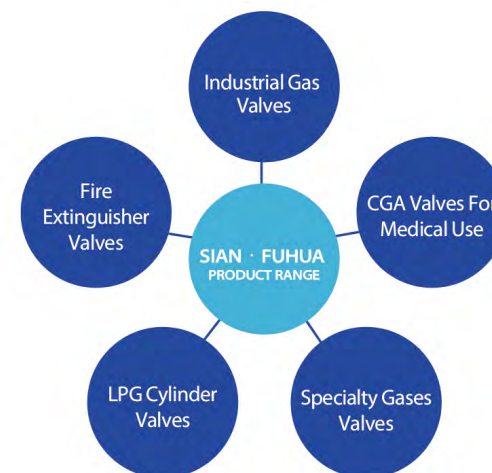

Sian (Fuhua) produces a wide range of Industrial Gas Valves,CGA Valves For Medical Use,Special Gas Valves,LPG Valves and Fire Extinguisher Valves with annual output 20 million units.Our products have been exported to main overseas market.



COMPREHENSIVE GAS CYLINDER VALVES

Sian Valve Co., Ltd offers a wide range of valves including industrial gas valves and medical gas valves. Sian Committed to fluid control, creating a safe and livable environment for humans. We have cooperation with domestic and overseas well-known oil & gas companies, gas cylinder companies.

Axial Connection Type

Model: MA2-11
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: W21.8x1/14
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-805-705



Axial Connection Type

Model: QF-2A
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8
Diameter: Φ6mm
Safety Device: 20.25-22.5MPa

08-805-713



Movable Flap Type

Model: CGA320
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: 0.825-14NGO-RH(CGA320)
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-805-725



Axial Connection Type

Model: CGA320B
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: 3/4-14NGT
Outlet Thread: 0.825-14NGO-RH(CGA320)
Diameter: Φ6mm
Safety Device: 20.25-22.5MPa

08-805-737



Axial Connection Type

Model: QF-2A8
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: W21.8x1/14
Diameter: Φ6mm
Safety Device: 20.25-22.5MPa

08-805-734



Axial Connection Type

Model: QF-35C
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: 1.125-12UNF
Outlet Thread: 0.825-14NGO-RH-EXT(CGA320)
Diameter: Φ4mm
Safety Device: 19±1.5MPa

08-805-746





COMPREHENSIVE GAS CYLINDER VALVES



Axial Connection Type CO₂ pressure maintaining valve

Model: RPV-GV6
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: 25E
Outlet Thread: G5/8
Diameter: Φ6mm
Safety Device: 20.25-22.5MPa

08-805-766



Axial Connection Type CO₂ pressure maintaining valve

Model: RPV-GV6
Medium: CO₂
WP (MPa): 20MPa
Inlet Thread: 25E
Outlet Thread: G5/8
Diameter: Φ6mm
Safety Device: 28.5-31.5MPa

08-805-766A



CO₂ aluminum bottle valve

Medium: CO₂
WP (MPa): 250bar
Inlet Thread: PZ27.8
Outlet Thread: Tr21×4
Diameter: Φ3mm
Safety Device: 250-275bar
Certification: π0036

08-823-716



Axial Connection Type

Model: QF-2G
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8-INT
Diameter: Φ4mm
Safety Device: N/A

08-852-700



Axial Connection Type

Model: QF35D
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread: M25×2-6g
Outlet Thread: G5/8
Diameter: Φ2mm
Safety Device: 20.25-22.5MPa

08-852-702



Axial Connection Type

Model: MA2-10
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8-INT
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-852-764



Axial Connection Type

Model: QF-2A
Medium: CO₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8
Diameter: Φ6mm
Safety Device: 20.25-22.5MPa

08-805-758



Axial Connection Type

Medium: CO₂
WP (MPa): 200bar
Inlet Thread: 25E
Outlet Thread: G3/4
Diameter: Φ6mm
Safety Device: 220±15bar
Certification: π0036

08-812-705



Axial Connection Type

Model: MA2-10
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread: 3/4-16UNF
Outlet Thread: G5/8-INT
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-852-764B



Movable Flap Type

Model: QF-2
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-853-736A





COMPREHENSIVE GAS CYLINDER VALVES

Movable Flap Type

Model: CGA540B
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread :
0.903-14NGO-RH(CGA540)
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-853-758



Movable Flap Type

Model: CGA540A
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : 3/4-14NGT
Outlet Thread :
0.903-14NGO-RH(CGA540)
Diameter: Φ4mm
Safety Device: 19.5-22.5MPa

08-853-789



Movable Flap Type

Model: QF-2C
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: N/A

08-855-731A



Movable Flap Type

Model: QF-2
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-853-769



Movable Flap Type

Model: QF-2C
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: N/A

08-855-733



Movable Flap Type

Model: QF-6A
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8-INT
Diameter: Φ4mm
Safety Device: N/A

08-856-711



Movable Flap Type

Model: QF-5
Medium: O₂/Air/N₂
WP (MPa): 20MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: 26-30MPa

08-853-756



Movable Flap Type

Model: CGA540A
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread :
0.903-14NGO-RH(CGA540)
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa

08-853-781



Needle Type

Model: QF-2D
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8-INT
Diameter: Φ4mm
Safety Device: N/A

08-857-710



Axial Connection Type

Model: QF-7D2
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8-INT
Diameter: Φ4mm
Safety Device: N/A

08-857-712





COMPREHENSIVE GAS CYLINDER VALVES



O2 cylinder valve

Medium: O₂
WP (MPa): 200bar
Inlet Thread: 25E
Outlet Thread: G3/4
Diameter: Φ4mm
Safety Device: N/A
Certification: π0036



08-802-785

Axial Connection Type

Model: GV-5
Medium: O₂
WP (MPa): 20MPa
Inlet Thread: 25E
Outlet Thread: G5/8
Diameter: Φ4mm
Safety Device: N/A



08-905-704B

CNG Cylinder Valve

Model: QF-T1B
Medium: CNG
WP (MPa): 20MPa
Inlet Thread: PZ27.8
Outlet Thread: 1/4-18NPT-INT
Diameter: Φ6mm
Safety Device: 30-33MPa、110±5℃



08-881-740

CNG Refilling Valve

Model: QF-T1H2
Medium: CNG
WP (MPa): 20MPa
Inlet Thread: G1/2
Outlet Thread: M12×1-INT
Diameter: Φ5mm
Safety Device: N/A



08-882-777

Natural gas cylinder valve

Model: QF-5T
Medium: CNG
WP (MPa): 20MPa
Inlet Thread: PZ27.8
Outlet Thread: W21.8x1/14-LH
Diameter: Φ5mm
Safety Device: 30-33MPa、110±5℃



08-882-783

Natural gas cylinder valve for vehicle

Model: CTF-1
Medium: CNG
WP (MPa): 20MPa
Inlet Thread: PZ27.8
Outlet Thread: 1/4-18NPT-INT
Diameter: Φ6mm
Safety Device: 30-33MPa、110±5℃



08-886-716

Diaphragm Type

Model: QF-21
Medium: O₂/Air/N₂
WP (MPa): 15MPa
Inlet Thread: PZ19.2
Outlet Thread: W21.8x1/14
Diameter: Φ2mm
Safety Device: 19.5-22.5MPa



08-858-702

CNG Cylinder Valve

Model: QF-T1X
Medium: CNG
WP (MPa): 20MPa
Inlet Thread: PZ27.8
Outlet Thread: 1/4-18NPT-INT
Diameter: Φ5mm
Safety Device: 30-33MPa、110±5℃



08-881-734

Coupling Type

Model: PX-32A
Medium: Ar
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8
Diameter: Φ4mm
Safety Device: N/A



08-803-715

Coupling Type

Model: PX-32A
Medium: Ar
WP (MPa): 15MPa
Inlet Thread: PZ27.8
Outlet Thread: G5/8
Diameter: Φ4mm
Safety Device: N/A



08-803-720



COMPREHENSIVE GAS CYLINDER VALVES



Axial Connection Type pressure maintaining valve

Model: RPV-GV6
Medium: N₂/Ar/He
WP (MPa): 20MPa
Inlet Thread : 25E
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: N/A



08-850-786A

Axial Connection Type pressure maintaining valve

Model: RPV-GV6
Medium: N₂/Ar/He
WP (MPa): 20MPa
Inlet Thread : 25E
Outlet Thread : G5/8-INT
Diameter: Φ4mm
Safety Device: N/A



08-850-788

Needle type

Model: QF-13C1
Medium: Freon
WP (MPa): 3MPa
Inlet Thread : PZ27.8
Outlet Thread : G3/4
Diameter: Φ7mm
Safety Device: N/A



08-804-708

Refrigerant gas cylinder valve

Model: QF-13B
Medium: HF0-1234yf
WP (MPa): 3MPa
Inlet Thread : PZ27.8
Outlet Thread : W21.8x1/14-LH
Diameter: Φ4mm
Safety Device: 3.9-4.4MPa



08-804-744

Diaphragm Type

Model: QF-30
Medium: H₂
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : W21.8x1/14-LH
Diameter: Φ4mm
Safety Device: N/A



08-832-704

Needle Type

Model: QF-15
Medium: C₂H₂
WP (MPa): 3MPa
Inlet Thread : PZ39
Outlet Thread : POSTTYPE
Diameter: Φ4mm
Safety Device: Fusible Alloy 100±5℃



08-841-700

Diaphragm Type

Model: CGA580A
Medium: Ar
WP (MPa): 15MPa
Inlet Thread : 3/4-14NGT
Outlet Thread : 0.965-14NGO (CGA580)
Diameter: Φ4mm
Safety Device: 20.25-22.5MPa



08-803-738

Axial Connection Type

Model: GV-5
Medium: N₂/Ar/He
WP (MPa): 20MPa
Inlet Thread : 25E
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: N/A



08-905-704A

Needle Type

Model: QF-10
Medium: Cl₂
WP (MPa): 2MPa
Inlet Thread : PZ27.8
Outlet Thread : G3/4
Diameter: Φ6mm
Safety Device: N/A



08-860-700

High purity gas cylinder valve

Model: QF-90A
Medium: High purity gas
WP (MPa): 15MPa
Inlet Thread : PZ27.8
Outlet Thread : G5/8
Diameter: Φ4mm
Safety Device: N/A



08-880-710



LPG CYLINDER VALVES

The first-class equipment produces first-class valves. Sian LPG cylinder valves are not only safe and reliable, but also provide users with better safety gas use experience

V6 valve with handwheel Australia

Model: V6
Medium: LPG
WP (MPa): 250 psig (1.7MPa)
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14UNS-LH
Diameter: Φ6mm
Safety Device: 375PSI
Certification: UL

06-610-711



V9 valve with handwheel Australia

Model: V9
Medium: LPG
WP (MPa): 250 psig (1.7MPa)
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14UNS-LH
Diameter: Φ8mm
Safety Device: 375PSI
Certification: UL

06-610-712



V6 copper valve with handwheel Vietnam

Model: V6S3
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14NGO-LH
Diameter: Φ6.5mm
Safety Device: 375PSI

06-610-773



OPD valve with handwheel U.S.

Model: QCC
Medium: LPG
WP (MPa): 250 psig (1.7MPa)
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14UNS-LH+1.312-5ACME
Diameter: Φ7mm
Safety Device: 375PSI
Certification: UL

06-610-723



V6 copper valve with handwheel Vietnam

Model: V6S3
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14NGO-LH
Diameter: Φ6.5mm
Safety Device: 375PSI

06-610-782



CPV 100 pound valve with handwheel U.S.

Model: CPV51012N7-375-11.6
Medium: LPG
WP (MPa): 250 psig (1.7MPa)
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14NGO-LH
Diameter: Φ8mm
Safety Device: 375PSI
Certification: UL

06-610-736





LPG CYLINDER VALVES

40 pound valve with handwheel Columbia

Model: U40
Medium: LPG
WP (MPa): 250 psig (1.7MPa)
Inlet Thread : 3/4-14 NGT
Outlet Thread :
 0.885-14NGO-LH
Diameter: Φ7mm
Safety Device: 2.7MPa



06-610-732

Double pin valve with handwheel U.S.

Model: U.S. OPD
Medium: LPG
WP (MPa): 240psi
Inlet Thread : 3/4-14 NGT
Outlet Thread :
 0.885-14UNS-LH +1.312-5ACME
Diameter: Φ7mm
Safety Device: 375PSI



06-610-790

100 pound valve with handwheel Mexico

Model: MX100
Medium: LPG
WP (MPa): 3.3MPa
Inlet Thread : 3/4-14 NGT
Outlet Thread : 0.885-14NGO-LH
Diameter: Φ6.5mm
Safety Device: 2.7MPa



06-610-739

100 pound valve with handwheel Brazil

Model: CPV51012N7-375-BZ100
Medium: LPG
WP (MPa): 1.7MPa
Inlet Thread : 3/4-14 NGT
Outlet Thread :
 0.885-14NGO-LH
Diameter: Φ8mm
Safety Device: 360-480PSI



06-610-768

8# valve with handwheel SHV Poland

Model: V12-003-(17E)
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 17E
Outlet Thread : W21.8x1.814-LH
Diameter: Φ6mm
Safety Device: N/A



06-610-749

10# valve with handwheel SHV Poland

Model: V12-004-(17E)
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 17E
Outlet Thread : W21.8x1.814-LH
Diameter: Φ6mm
Safety Device: N/A



06-610-750

7# valve with handwheel SHV France

Model: France SHV Type
Medium: LPG
WP (MPa): 25bar
Inlet Thread : Φ23.2x2
Outlet Thread : 0.885-14NGO-LH
Diameter: Φ7mm
Safety Device: N/A



06-610-743

9# valve with handwheel SHV Poland

Model: V12-001-(25E)
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 25E
Outlet Thread : W21.8x1.814-LH
Diameter: Φ6mm
Safety Device: N/A



06-610-747

11# valve with handwheel SHV Poland

Model: V12-002-(25E)
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 25E
Outlet Thread : W21.8x1.814-LH
Diameter: Φ6mm
Safety Device: N/A



06-610-748



LPG CYLINDER VALVES

12# valve with handwheel SHV Poland

Model: V12-005-(17E)
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 17E
Outlet Thread : W21.8x1.814-LH
Diameter: Φ6mm
Safety Device: N/A

06-610-753



13# valve with handwheel SHV Poland

Model: V12-006-(25E)
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 25E
Outlet Thread : W21.8x1.814-LH
Diameter: Φ6mm
Safety Device: N/A

06-610-754



P13 self-closing valve

Model: P13
Medium: LPG
WP (MPa): 1.7MPa
Inlet Thread : 3/4-14 NGT
Outlet Thread : 5/8-11UNC
Diameter: Φ9.3mm
Safety Device: N/A

98-015-011



P13 valve with PRD straight Brazil

Model: P13 with PRD
Medium: LPG
WP (MPa): 1.7MPa
Inlet Thread : 3/4-14 NGT
Outlet Thread : 5/8-11UNC
Diameter: Φ9.3mm
Safety Device: 375PSI

06-610-767



PV05 valve with handwheel

Model: PV05-V4-02
Medium: LPG
WP (MPa): 25bar
Inlet Thread : W19.8x1/14
Outlet Thread : W21.8x1.814-LH
Diameter: Φ7mm
Safety Device: N/A
Certification: TPED

06-610-728



D20 self-closing valve Malaysia certification

Model: Malaysia D20
Medium: LPG
WP (MPa): 1.7MPa
Inlet Thread : W28.8x1/14
Outlet Thread : Φ20
Diameter: Φ6.35mm
Safety Device: 375PSI

06-610-769



PV05 handwheel valve with PRD

Model: PV05-V4-01
Medium: LPG
WP (MPa): 25bar
Inlet Thread : W19.8x1/14
Outlet Thread : W21.8x1.814-LH
Diameter: Φ7mm
Safety Device: 35bar
Certification: TPED

06-610-727



D22 Self-closing valve PI certification

Model: PV02-D22
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 3/4-14 NGT
Outlet Thread : Φ22
Diameter: Φ6.35mm
Safety Device: 26bar

06-610-726



D20 self-closing valve Malaysia certification

Model: Malaysia D20
Medium: LPG
WP (MPa): 1.7MPa
Inlet Thread : 3/4-14 NGT
Outlet Thread : Φ20
Diameter: Φ6.35mm
Safety Device: 375PSI

06-610-774





LPG CYLINDER VALVES

D22 self-closing valve Ecuador

Model: D22
Medium: LPG
WP (MPa): 21bar
Inlet Thread : 3/4-14 NGT
Outlet Thread : Ø22
Diameter: Ø6.35mm
Safety Device: N/A

06-610-788



K4 plug-in inflation valve

Model: CK-4
Medium: LPG
WP (MPa): 1.75MPa
Inlet Thread : 3/4-14 NGT
Outlet Thread : Ø19
Diameter: Ø6.4mm
Safety Device: 2.6-3.3MPa

06-622-702A



Valve with handwheel Guatemala

Model: Guatemala Type
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 1/4-18NPT
Outlet Thread : W20x1.814-LH
Diameter: Ø7mm
Safety Device: N/A

06-610-775



Jumbo valve Chile

Model: YSF-15-00
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 25E
Outlet Thread : Ø28.5
Diameter: Ø4mm
Safety Device: 375PSI

06-610-776



Pressure relief valve U.S.

Model: U.S. Type
Medium: LPG
WP (MPa): N/A
Inlet Thread : 1/4-18 NPT
Outlet Thread : N/A
Diameter: Ø5mm
Safety Device: 18bar

06-610-789



Shaping Camping Valve

Model: camping
Medium: LPG
WP (MPa): 25bar
Inlet Thread : M22x1.25
Outlet Thread : M16x1.5-LH
Diameter: Ø8.5mm
Safety Device: N/A

98-015-019



Mini Jumbo Valve Philippines

Model: D16
Medium: LPG
WP (MPa): 25bar
Inlet Thread : 3/4-14 NGT
Outlet Thread : Ø16
Diameter: Ø4.2mm
Safety Device: 26bar

06-610-783



Hexagonal camping valve certification

Model: PV01-01
Medium: LPG
WP (MPa): 25bar
Inlet Thread : M22x1.25
Outlet Thread : M16x1.5-LH
Diameter: Ø8.5mm
Safety Device: N/A
Certification: TPED

98-015-010





FIRE EXTINGUISHER VALVES

Sian fire extinguisher valves are often used in CO₂ high pressure cylinder with a working pressure of 174 bars. And Dry powder fire extinguisher cylinder with 20 bars. Fire Extinguisher Valves can be equipped with bursting disc and leak valve.

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M30×1.5 (M16×1.5)
Outlet Thread: M14×1.5
Safety Device: N/A



00-023-771

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M45×1.5 (M16×1.5)
Outlet Thread: M14×1.5
Safety Device: N/A



00-042-700

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M45×1.5 (M16×1.5)
Outlet Thread: M16×1.5
Safety Device: N/A



00-048-708

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M30×1.5 (M16×1.5)
Outlet Thread: M14×1.5
Safety Device: N/A



01-119-755

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M24×1.5 (M16×1.5)
Outlet Thread: G1/8
Safety Device: 22-28bar
Certification: CE



01-111-763

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M30×1.5 (M16×1.5)
Outlet Thread: M14×1.5
Safety Device: N/A



01-120-701A



FIRE EXTINGUISHER VALVES

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread : M30×1.5 (M16×1.5)
Outlet Thread : M14×1.5
Safety Device: N/A

01-120-743



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread : M30×1.5 (M16×1.5)
Outlet Thread : M14×1.5
Safety Device: N/A

01-120-747



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread : M30×1.5 (M16×1.5)
Outlet Thread : M14×1.5
Safety Device: N/A

01-120-749



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread : M30×1.5 (M16×1.5)
Outlet Thread : M14×1.5
Safety Device: N/A

01-137-761



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread : M30×1.5 (M16×1.5)
Outlet Thread : G1/4
Safety Device : 22-28bar
Certification: CE

01-135-715



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread : M30×1.5 (M16×1.5)
Outlet Thread : M16×1.5
Safety Device: N/A

01-137-767





FIRE EXTINGUISHER VALVES

Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M30x1.5 (M16x1.5)
Outlet Thread: G1/4
Safety Device: 22-26bar

01-137-801



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: G2"-11 (G3/4"-14)
Outlet Thread: G3/4"-14
Safety Device: 22-28bar
Certification: CE

01-161-729



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M30x1.5 (M16x1)
Outlet Thread: G1/8
Safety Device: N/A

01-174-701



Dry powder fire extinguisher valve

Medium: Dry powder
Inlet Thread: M52x1.5 (M22x1.5)
Outlet Thread: M18x1.5
Safety Device: N/A

01-181-703





FIRE EXTINGUISHER VALVES

CO₂ fire extinguisher valve

Medium: CO₂
Inlet Thread : W19.8 (M10×1)
Outlet Thread : W21.8-14
Safety Device: 192-222bar
Certification: CE



02-227-750

CO₂ fire extinguisher valve

Medium: CO₂
Inlet Thread : M25×2 (M10×0.75)
Outlet Thread : W21.8-14
Safety Device: 192-222bar
Certification: CE



02-234-762A

CO₂ fire extinguisher valve

Medium: CO₂
Inlet Thread : 25E (M10×1)
Outlet Thread : W21.8-14
Safety Device: 192-222bar
Certification: CE



02-235-761

CO₂ fire extinguisher valve

Medium: CO₂
Inlet Thread : 25E (M10×1)
Outlet Thread : W21.8-14
Safety Device: 192-222bar
Certification: CE



02-230-777

CO₂ fire extinguisher valve

Medium: CO₂
Inlet Thread : 25E (M10×1)
Outlet Thread : W21.7-14
Safety Device: 192-222bar
Certification: CE



02-248-750

CO₂ fire extinguisher valve

Medium: CO₂
Inlet Thread : 25E (M10×1)
Outlet Thread : W21.7-14
Safety Device: 192-222bar
Certification: CE



02-248-757